DRAWING NUMBER
D 2501 8060-034

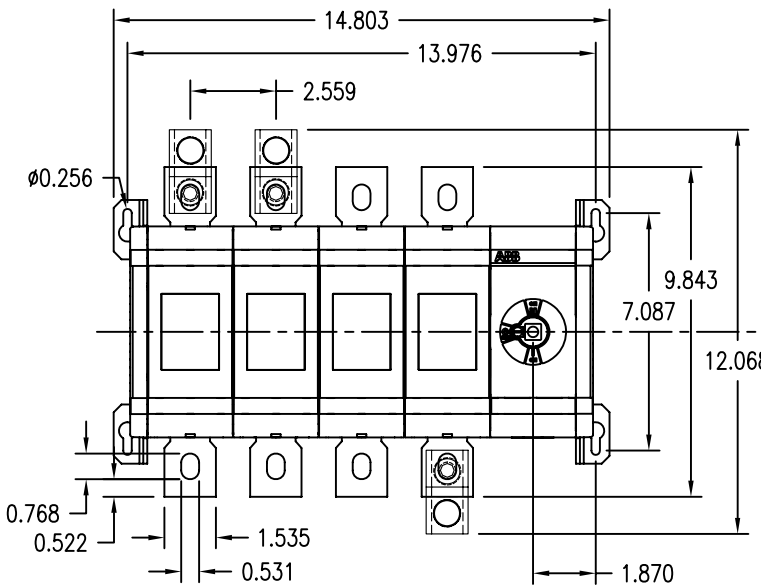

FRONT VIEW

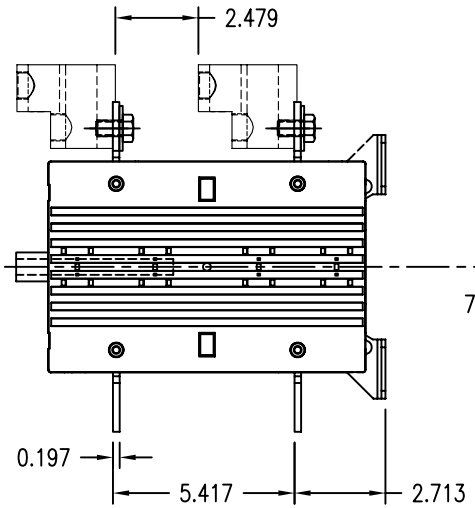

RIGHT SIDE VIEW

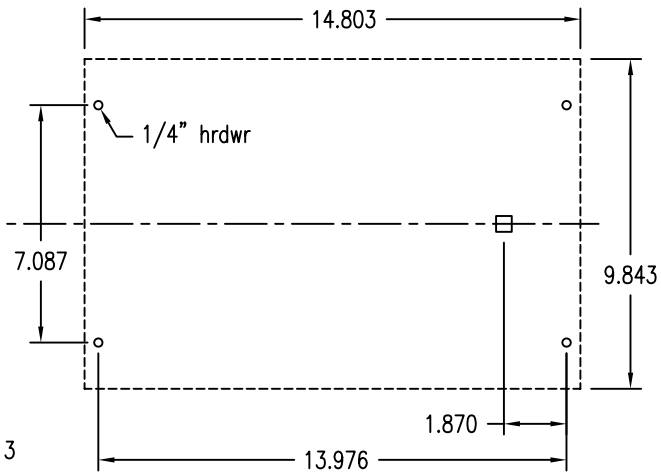

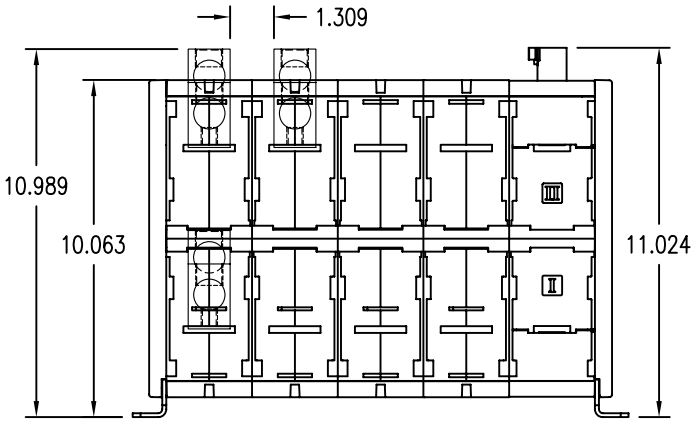

BOTTOM VIEW

OT600U40C
600VAC 600A 4-Pole
Manual Transfer Switch
Rotary operated, 3-pos.,
center OFF, open transition

cULus Listed, 97C2
Open Type Switch
UL File #101914

CSA Certified, File #58077

Short Circuit Rating at 600VAC		
kA	Fuse/A	Fuse class
100	800	J, T or L
100	600	RK5
30	Circuit Breaker	

3-phase HP Ratings				
VAC	208	240	480	600
HP	-	200	450	500

Accessories:

Operating Handle
OHB175J12E011 - Type 1, 3R, 12
OHB175L12E011 - Type 1, 3R, 4, 4X, 12
Ref. drawing D 2301 8001-002 for pistol grip handle dimensions and installation details.

Terminal Lug Kits
OZXA-800 - 6 lugs
OZXA-800/12 - 12 lugs,
for use with OTZC_ busbar kit

Operating Shaft - Max. encl. depth
OXP12X220 - 14.20 in.
OXP12X280 - 16.50 in.
OXP12X325 - 18.30 in.
OXP12X395 - 21.10 in.
OXP12X465 - 23.80 in.
OXP12X625 - 30.10 in.

Auxiliary Contacts
OA1G10 - 1n.o.
OA3G01 - 1n.c.

Terminal Lugs
Wire Range:
(2) #2 AWG - 600kcmil
AL7CU, UL Listed



Bridging busbar kit:
OTZC34
(4 pcs., for common
load connection)



REV. LET.	REVISIONS	DATE	REV OR APPD BY

THIS DRAWING IS THE PROPERTY OF ABB Inc. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED OR DISCLOSED OTHER THAN EXPRESSLY AUTHORIZED BY ABB Inc.

ABB Inc.

DATE 10-12-07
DRAWN JWD
CHK'D
PROJECT NO.
SHEET 1 OF 1

REV. A

SIZE A

TITLE
OT600U40C
Transfer Switch

DRAWING NUMBER
D 2501 8060-034