DRAWING NUMBER
D 2401 1420-015

TYPICAL COMPONENTS

Amp Min.	Amp Max.	HP@ 480V	MODEL	SFT STR	BYP CNTR	CCT
60	156	125	T125L1-4	PST175-600-70	A145-30-11-84	T4250PSF1
75	180	150	T150L1-4	PST210-600-70	A145-30-11-84	T4250PSF1
75	240	200	T200L1-4	PST250-600-70	A185-30-11-84	T4250PSF1
90	302	250	T250L1-4	PST300-600-70	A250-30-11-84	T4300PSF1

NOTES:
TYPICAL COMPONENTS BASED ON 480 V AND 120 V CONTROL VOLTAGE. FOR MINIMUM LOAD AMPS, CONTACT FACTORY.

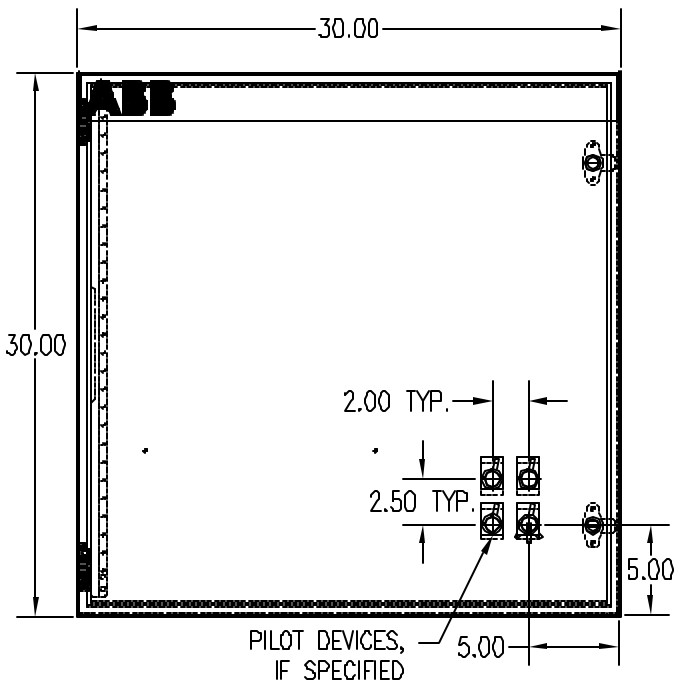

FRONT VIEW

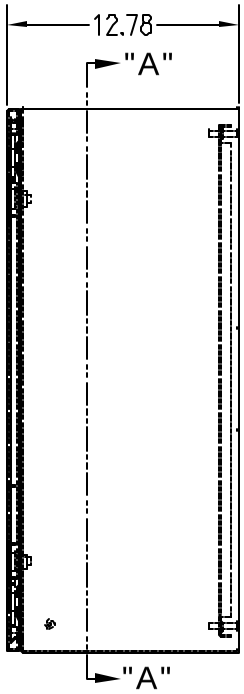

SIDE VIEW

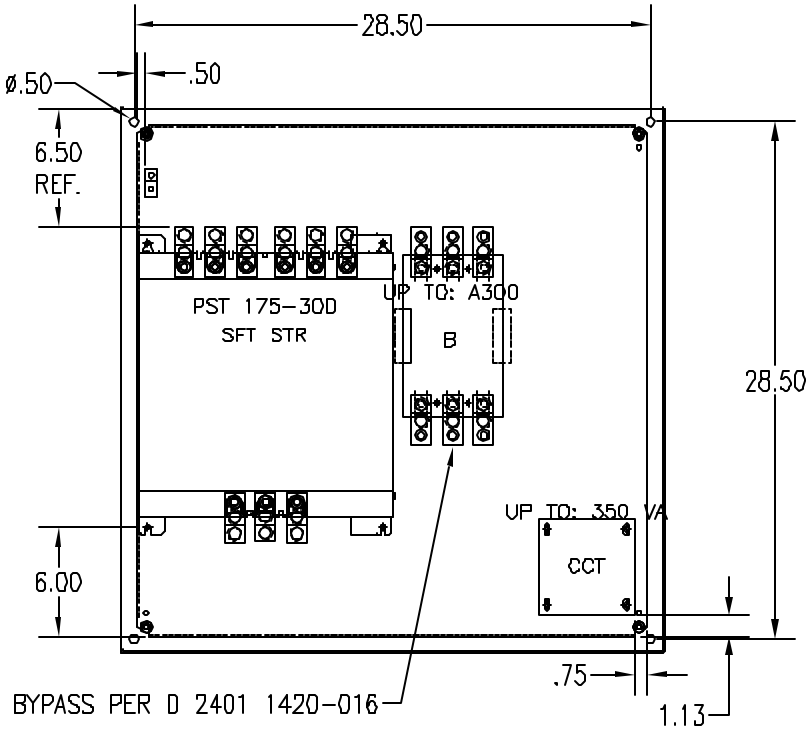

SECTION "A"-"A"

NOTES:

1) FOR MODELS WITH HOA AND START/STOP, LOCATE PUSHBUTTONS TO THE LEFT OF THE HOA. LOCATE LIGHTS ABOVE THE HOA.
2) PLACE RUN LIGHT ABOVE HOA OR START/STOP. IF EQUIPPED WITH BOTH, PUT RUN ABOVE HOA.

SHOP

REV. LET.	REVISIONS	DATE	REV OR APPD BY
F	ADD COMPONENT TABLE	10/12/04	NJH
E	REVISED PLACEMENT OF SFT STR, BYP, & CCT	9/10/04	KBM
D	SFT STR DIM WAS 5.17 FROM PANEL TO LUG, RE-DIMNSIONED TO SFT STR NTG HOLE 6.00	7/30/04	KBM
C	UPDATE TITLE BLOCK FOR ALL NEMA STYLES	3/4/05	NJH
B	SHOW LONG CRIMP LUG GEOMETRY	9/18/03	NJH

DO NOT SCALE DRAWING
SCALE 3/32 — DIMENSIONS ARE IN INCHES
Material: C-SD303012 30X30X12 N12,4
Finish:
STANDARD TOLERANCES: 2 PL DEC. ±.030 | 3 PL DEC. ±.030 | ANGLES ±1°

THIS DRAWING IS THE PROPERTY OF ABB Inc. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED OR DISCLOSED OTHER THAN EXPRESSLY AUTHORIZED BY ABB Inc.

ABB Inc.

DATE 9/16/03
DRAWN NJH
CHK'D
APPR'D
PAGE 1 OF 1

REV. F
SIZE A

TITLE
PANEL LAYOUT SFT STR
PST175-300, N12,4,3R,1,BYP

DRAWING NUMBER
D 2401 1420-015