DRAWING NUMBER
D 2401 1420-077

TYPICAL COMPONENTS

Amp Min.	Amp Max.	HP@ 480V	MODEL	SFT STR	OL	CCT
120	361	300	T300L1-4S	PSTB370-600-70	E300DU500	T4250PSF1
150	414	350	T350L1-4S	PSTB470-600-70	E300DU500	T4250PSF1
150	477	400	T400L1-4S	PSTB470-600-70	E300DU500	T4250PSF1

NOTES:
TYPICAL COMPONENTS BASED ON 480 V AND 120 V CONTROL VOLTAGE. FOR MINIMUM LOAD AMPS, CONTACT FACTORY.

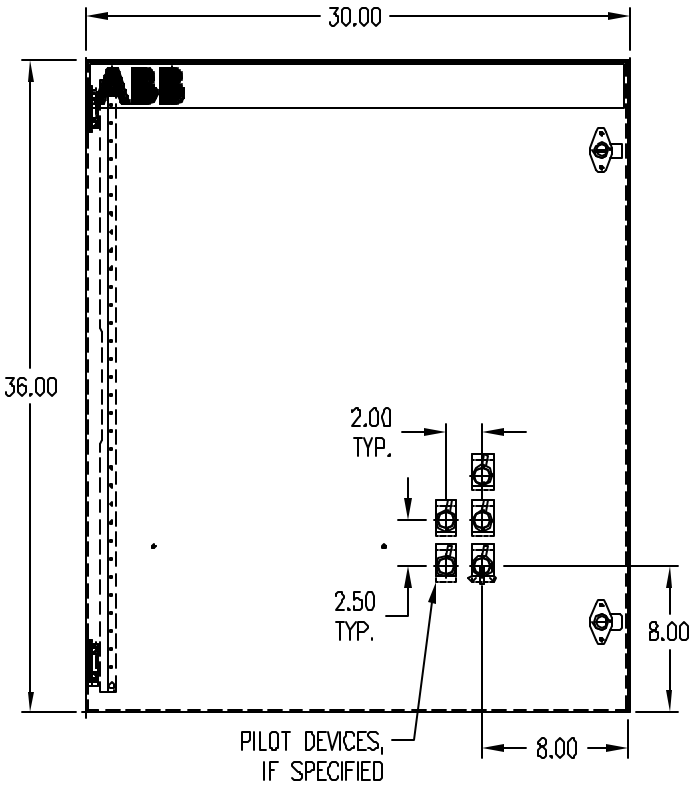

FRONT VIEW

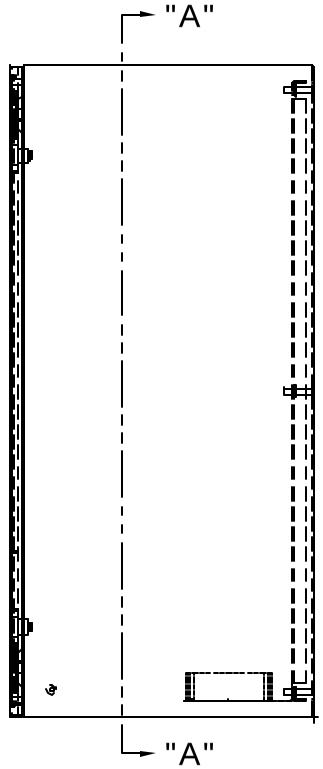

SIDE VIEW

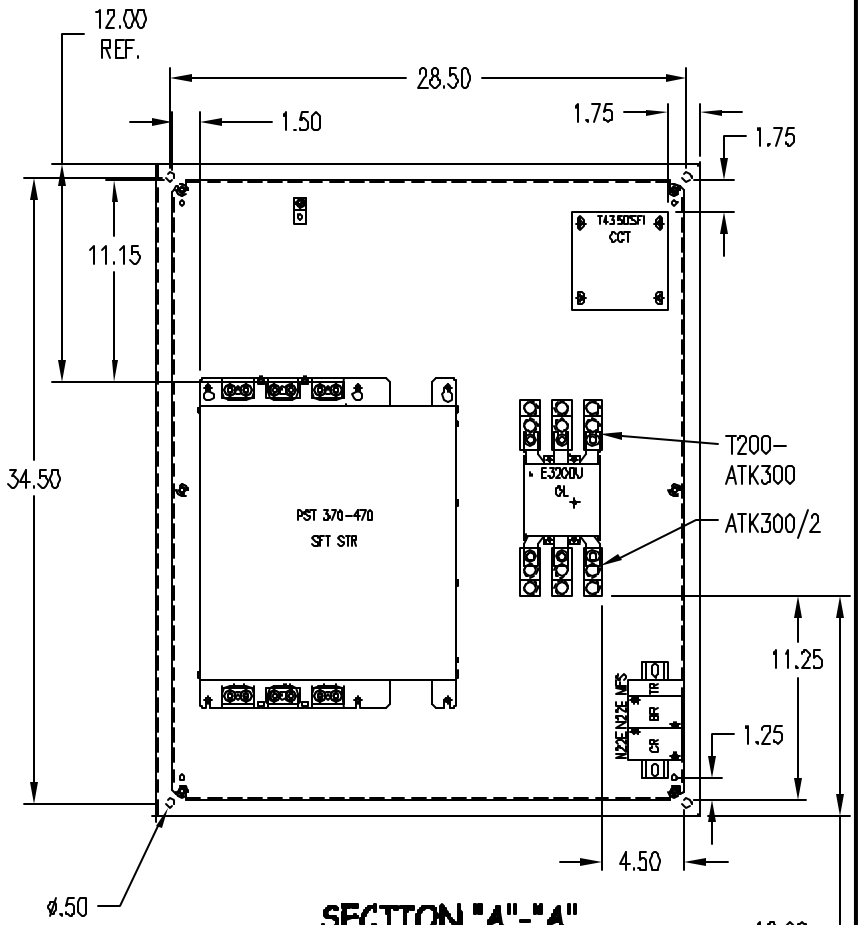

SECTION "A"-"A"

PANEL SIZE 34.20" X 28.2"

NOTES:

1) PLACE RUN LIGHT ABOVE DEVICE USED TO STOP MOTOR. PLACE ANY OTHER
2) INDICATOR LIGHTS BELOW RUN.
FOR MODELS EQUIPPED WITH HOA AND START-STOP, PLACE STOP TO LEFT OF HOA. PLACE RUN LIGHT ABOVE HOA IF REQUIRED.

SHOP/WEB

REV. LET.	REVISIONS	DATE	REV OR APPD BY

DO NOT SCALE DRAWING
SCALE 3/32 — DIMENSIONS ARE IN INCHES
Material: C-SD363016 N4, 12
Finish:

STANDARD TOLERANCES		
2 PL DEC.	3 PL DEC.	ANGLES
±.030	±.030	±1°

THIS DRAWING IS THE PROPERTY OF ABB Inc. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED OR DISCLOSED OTHER THAN EXPRESSLY AUTHORIZED BY ABB Inc.

ABB Inc.

DATE 10/13/04
DRAWN NJH
CHK'D
APPR'D
PAGE 1 OF 1

REV. A
SIZE A

TITLE
PANEL LAYOUT E-BYP
PSTB370-470, N4,12,3R

DRAWING NUMBER
D 2401 1420-077